



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ARDENT CONCEPTS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ARDENT CONCEPTS, INC. IS PROHIBITED.


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
NR	NOT RELEASED	5-29-12	BMS

D
C
B
A

D
C
B
A

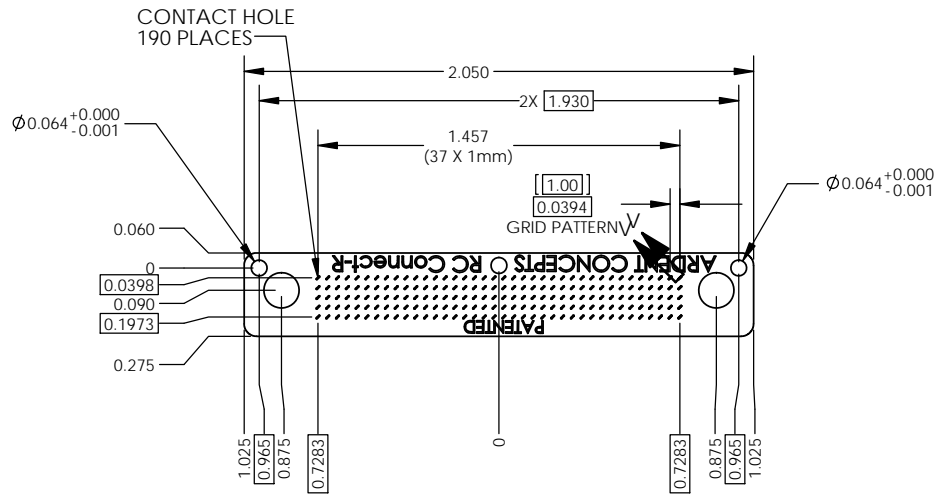

- NOTES:
- DRAWING CONFORMS TO ASME Y14.100
 - MATERIAL:
HOUSING: LIQUIP CRYSTAL POLYMER
CONTACT: BeCu ALLOY 190
 - CONTACT FINISH: 20 MICROINCHES MINIMUM ELECTROPLATED HARD GOLD (120 KNOOP MIN) OVER 50 MICROINCHES MINIMUM ELECTROPLATED NICKEL
 - TEMPERATUR RANGE -54 °C TO 120 °C
 - ELECTRICAL CHARACTERISTICS:
CONTACT RESISTANCE: < 50 MILLIOHMS
CONTACT FORCE: < 50 GRAMS
INSERTION LOSS: < .5db AT 10 GHz
 - △6. TEXT TO BE SUB-FLUSH

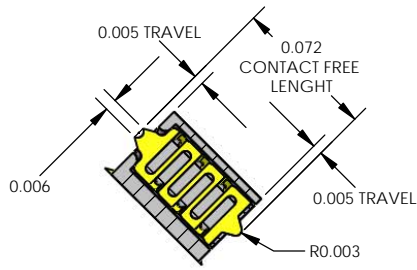

SECTION V-V
SCALE 16 : 1



INCH UNLESS OTHERWISE SPECIFIED.		DRAWN BMS	DATE 8-30-11	 130 LEDGE ROAD SEABROOK, NH 03874 603-474-1760
TOLERANCES: ANGLES: ± 3 X.XX = ± .005 X.XXX = ± .002 X.XXXX = ± .001		CHECKED	ENG APPR	
CHANGE	NOTE	PROJECTION	SIZE B	TITLE: 190 CONTACT INTERPOSER ASSEMBLY
MATERIAL	SEE NOTES		INTERPRET GEOMETRIC TOLERANCING PER: ANSI Y14.100	DWG. NO. CA190CR1001
FINISH	SEE NOTES		WWW.ARDENTCONCEPTS.COM	SCALE: 2:1
			WEIGHT:	REV NR
			SHEET 1 OF 1	